




ASRD 14

Three-phase current transformer set

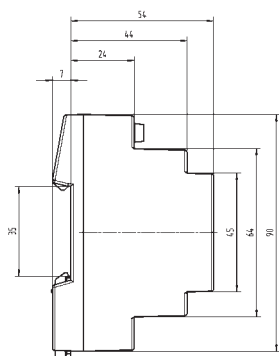

| Secondary current | | 5A | | 1A | |
|----------------------|--------------|----------------|----------|----------------|----------|
| Primary current A | Burden VA | Accuracy class | | Accuracy class | |
| | | 1 | 0.5 | 1 | 0.5 |
| | | Art.-no. | Art.-no. | Art.-no. | Art.-no. |
| 3 x 50 | 1 | 96030 | | 96230 | |
| 3 x 60 | 1.25 | 96032 | | 96232 | |
| 3 x 75 | 1.5 | 96034 | | 96234 | |
| 3 x 80 | 1.5 | 96036 | | 96236 | |
| 3 x 100 | 2.5 | 96038 | 96012 | 96238 | 96212 |
| 3 x 125 | 2.5 | 96039 | 96014 | 96241 | 96214 |
| | 3.75 | 96041 | | | |
| 3 x 150 | 2.5 | 96040 | 96017 | 96244 | 96217 |
| | 3.75 | 96044 | | | |

| | |
|-------------------|---------------|
| Primary conductor | — |
| Round conductor | 3 x Ø 13.5 mm |
| Transformer width | 105 mm |
| Snap-on mounting | integrated |
| Sealed shutter | — |