




ASR 22.3

Tube current transformer

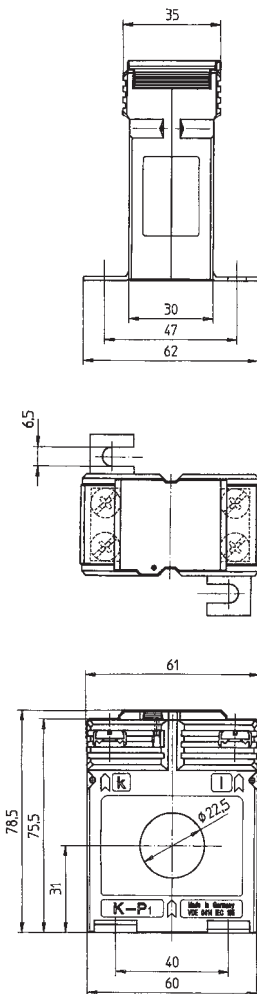

Secondary current		5A			1A	
Primary current A	Burden VA	Accuracy class			Accuracy class	
		1	0.5	0.2s	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.	Art.-no.
40	1	3034			3234	
50	1	3035			3235	
	1.5	3036			3236	
60	1	3037			3237	
	1.5	3038			3238	
75	1.5	3039			3239	
	2.5	3040			3240	
80	1.5	3041			3241	
	2.5	3042			3242	
100	1.5	3043	3011	V04-1304C	3243	3211
	2.5	3044	3134		3244	3334
	3.75	3045			3245	
150	1.5	3046	3012	V04-1604C	3246	3212
	2.5	3047	3013	V04-1604D	3247	3213
	5	3048	3138		3248	3338
200	1.5		3014			3214
	2.5	3049	3015	V04-1704D	3249	3215
	5	3050	3016	V04-1704F	3250	3216
	10	3051			3251	
250	1.5		3017			3217
	2.5	3052	3018	V04-1804D	3252	3218
	5	3053	3019	V04-1804F	3253	3219
	10	3054	3020		3254	3220
	15	3055			3255	
300	2.5	3056	3022	V04-1904D	3256	3222
	5	3057	3023	V04-1904F	3257	3223
	10	3058	3024		3258	3224
	15	3059			3259	
400	2.5	3060	3025	V04-2004D	3260	3225
	5	3061	3026	V04-2004F	3261	3226
	10	3062	3027		3262	3227
	15	3063			3263	
500	2.5	3064	3028	V04-2104D	3264	3228
	5	3065	3029	V04-2104F	3265	3229
	10	3066	3030	V04-2104H	3266	3230
	15	3067			3267	
600	2.5	3068	3031	V04-2204D	3268	3231
	5	3069	3032	V04-2204F	3269	3232
	10	3070	3033	V04-2204H	3270	3233
	15	3071			3271	

ASR 22.3 2U

Primary conductor	Ø 22.5 mm
Round conductor	Ø 22.5 mm
Transformer width	61 mm
Snap-on mounting	Art.-no. 53011 see page 204
Sealed shutter	Art.-no. 59040 see page 205
Copper tubes	see page 204
Protection plug-in current transformer	see page 125
Current transformer for tariff applications	see page 167

Secondary current		5A	1A
Primary current A	Burden VA	Accuracy class	Accuracy class
		1	1
		Art.-no.	Art.-no.
200-100	5-2.5	3111	3311
300-150	5-2.5	3112	3312
	10-5	3113	3313
400-200	5-2.5	3114	3314
	10-5	3115	3315
500-250	5-2.5	3116	3316
	10-5	3117	3317
600-300	5-2.5	3118	3318
	10-5	3119	3319