


THERMOCOUPLE METER

Auxiliary Supply variations:

	(Voltage / Insulation)
5 V, 12 V, 24 V, 48 V DC $\pm 50\%$, converter	/ 1 kV
55...264 V, 47...440 Hz, and 72...370 V DC, converter	/ 3 kV
9...28 V DC	/ not isolated from display

Isolation scheme:

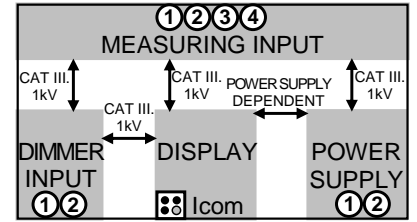

Ordering examples: (Input; Display: range, unit, colour; Auxiliary Supply)

CD40-96p-TC _ Input: -200...+1200 °C type J _ Display: -200...+1200 °C, yellow _ Aux: 55..264 V AC converter
 CD40-96p-TC _ Input: 0...1000 °C type K _ Display: 0...1000 °C, red, dimmable _ Aux: 24 V DC converter

On request for extra charge special ranges (Input, Display, Auxiliary Supply) are possible.

Outline and cut-out dimensions:

