

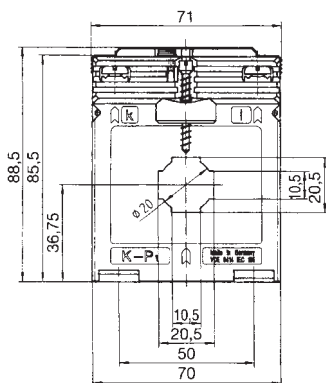




# SASK 421.4

Protection plug-in current transformer

Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5 Art.-no.	10P5 Art.-no.	5P5 Art.-no.	10P5 Art.-no.
200	1.5	S23-1706C	S23-1707C	S23-1716C	S23-1717C
	2.5	S23-1706D	S23-1707D	S23-1716D	S23-1717D
250	1.5	S23-1806C	S23-1807C	S23-1816C	S23-1817C
	2.5	S23-1806D	S23-1807C	S23-1816D	S23-1817C
300	1.5	S23-1906C	S23-1907C	S23-1916C	S23-1917C
	2.5	S23-1906D	S23-1907D	S23-1916D	S23-1917D
400	1.5	S23-2006C	S23-2007C	S23-2016C	S23-2017C
	2.5	S23-2006D	S23-2007D	S23-2016D	S23-2017D

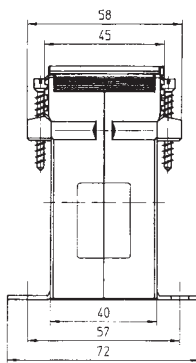

Primary conductor	20 x 10 mm
Round conductor	Ø 20 mm
Transformer width	71 mm
Snap-on mounting	—
Sealed shutter	<b>Art.-no. 59041</b> see page 205
Current transformer for industrial applications	see page 55