

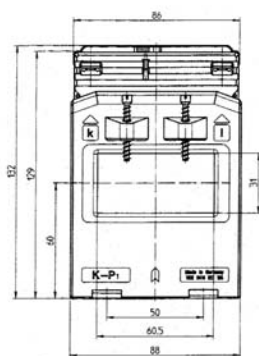




SASK 63.6

Protection plug-in current transformer

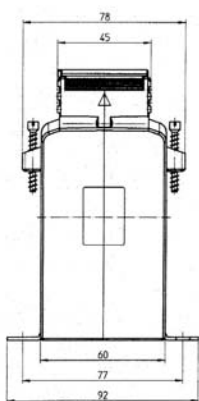

Secondary current		5A		1A	
Primary current A	Burden VA	Protection class		Protection class	
		5P5	10P5	5P5	10P5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
200	1.5	S46-1706C	S17-1707C	S46-1716C	S46-1717C
	2.5	S46-1706D	S46-1707D	S46-1716D	S46-1717D
250	1.5	S46-1806C	S46-1807C	S46-1816C	S46-1817C
	2.5	S46-1806D	S46-1807D	S46-1816D	S46-1817D
300	1.5	S46-1906C	S46-1907C	S46-1916C	S46-1917C
	2.5	S46-1906D	S46-1907D	S46-1916D	S46-1917D
400	2.5	S46-2006D	S46-2007D	S46-2016D	S46-2017D
	5		S46-2007F	S46-2016F	S46-2017F
500	2.5	S46-2106D	S46-2107D	S46-2116D	S46-2117D
	5	S46-2106F	S46-2107F	S46-2116F	S46-2117F
600	2.5	S46-2206D	S46-2207D	S46-2216D	S46-2217D
	5	S46-2206F	S46-2207F	S46-2216F	S46-2217F
750	2.5	S46-2306D	S46-2307D	S46-2316D	S46-2317D
	5	S46-2306F	S46-2307F	S46-2316F	S46-2317F
1000	2.5	S46-2506D	S46-2507D	S46-2516D	S46-2517D
	5	S46-2506F	S46-2507F	S46-2516F	S46-2517F

Primary conductor	60 x 30 mm
Round conductor	Ø 30 mm
Transformer width	88 mm
Snap-on mounting	—
Sealed shutter	Art.-no. 59042 see page 205
Current transformer for industrial applications	see page 74
Current transformer for tariff applications	see page 184