


Testers



**IEC 61010
600 V.
CAT IV**

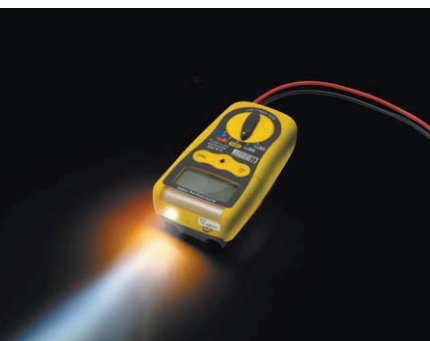

Simulation / source mA

Display
Calibre selection
Vdc / accuracy
Vac / accuracy (40-400 Hz)
No-contact voltage detection
I _{DC} / accuracy
Protection
I _{AC} / accuracy
Protection
Resistance • accuracy • Protection
Diode test • Test signals • Protection
Audible continuity • Buzzer • Protection
Built-in torch
Standards
Power supply
Other features
Dimensions
Weight

C.A 702 & C.A 703

> Easy handling and safety

- Built-in torch
- AC current detection

■ C.A 702

■ C.A 703

2,000 counts
Automatic (AUTORANGE)
200 mV / ±0.5 % R + 3 D
2.000 V ; 20.00 V ; 200.0 V ; 600 V / ±1.2 % R + 3 D
> 600 V / outside specifications
2.000 V ; 20.00 V / ±1.0 % R + 8 D
200.0 V ; 600 V / ±2.3 % R + 10 D
> 600 V / outside specifications
Yes
Yes
200.0 A ; 2000 A / ±2.0 % R + 8 D
20.00 mA ; 200.0 mA / ±2.0 % R + 8 D
200 mA / 500 V electronic fuse
200.0 A ; 2000 A / ±2.5 % R + 10 D
20.00 mA ; 200.0 mA / ±2.5 % R + 10 D
Protection 200 mA / 500 V electronic fuse
200.0 Ω / ±0.8 % R + 5 D • 2.000 kΩ, 20.00 kΩ, 200.0 kΩ / ±1.2 % R + 5 D
2.000 MΩ / ±5.0 % R + 5 D • 20.00 MΩ / ±10.0 % R + 5 D • 600 V rms
1.999 V • V Test ≤ 1.5 V I Test ≤ 1.5 A • 600 V rms
199.9 Ω • R < approx. 60 Ω • 600 V rms
Yes
Yes
IEC 61010 1000 V CAT III / 600 V CAT IV
2 x 1.5 V AAA batteries
Built-in Ø 4 mm test-probe leads connected to the instrument
104 x 55 x 32.5 mm
145 g

State at delivery



- > **C.A 702** delivered in blister pack with 2 x 1.5 V AAA batteries and 1 operating manual
- > **C.A 703** delivered in blister pack with 2 x 1.5 V AAA batteries and 1 operating manual

References to order

- > **C.A 702** > P01191739Z
- > **C.A 703** > P01191740Z

Accessories / Spares

- C.A 751 measurement adapter for 2P+E sockets > P01101997Z
- Crocodile clips (R/B) > P01102052Z
- Crocodile wire-grips (R/B) > P01102053Z
- Clamp wire-grips (R/B) > P01102054Z
- Insulation-piercing wire-grips (R/B) > P01102055Z
- Female test probe Ø 4 mm > P01102050Z
- 1.5 V LR03 battery > P0129603Z
- Case 200 x 100 x 40 mm with belt attachment > P01298065Z