

# CD40-72V-VDC

## DC VOLTAGE METER

### **Application:**

The panel meter is suitable for measuring the DC voltage.

### **Important features:**

- Full digital operation (lcom System).
- LED display range:  $\pm 9999$ , unit marking by LED.
- Preset delivery or connecting to external device can be set (monlcom option).
- Automatic zero calibration.
- Plug in terminal blocks with screw.
- EMC compliance.



Illustration only.

### **Technical specifications:**

#### **Input:** (at external power supply)

- Nominal input voltage range: ..... from  $0 \dots \pm 0.06$  V to  $0 \dots \pm 600$  V DC
- Input measuring range: ..... up to 120 % of the nominal value
- Input resistance: ..... 1 Mohm
- Input insulation voltage: ..... Cat. III. 1 kV (Test:  $4300$  V<sub>eff</sub> 1 min)


#### **Display:**

- Display colours: red (basic version), orange, yellow, green, blue, white LED
- Height of digits: ..... 14 mm
- Brightness control: ..... via dimming input on rear (optional)
- Dimmer input signal: ..... 5V PWM, approx. 1 kHz
- Dimmer input isolation: ..... Cat. III. 1 kV (Test:  $4300$  V<sub>eff</sub> 1 min)
- Display update: ..... 2 /s
- Accuracy: .....  $\pm 0.2\%$  FS,  $\pm 1$  digit (20 %..120 % input range)

#### **Other:**

- Standards applied: ..... IEC/EN 61010-1, IEC/EN 61326
- Auxiliary supply consumption: ..... max. 2 W
- Wire cross-section of terminals: ..... max. 2.5 mm<sup>2</sup>
- Working temperature: .....  $-10 \dots +25 \dots +60$  °C
- Temperature coefficient: ..... max. 100 ppm/°C
- Warm-up time: ..... 15 min
- Storage temperature: .....  $-40 \dots +80$  °C
- Humidity: ..... max. 85 %
- Vibration (acceleration): ..... max. 2 g
- Dimension (HxWxD): ..... 24 mm x 72 mm x 102 mm
- Case protection: ..... from the front IP 40, from behind IP 20
- Case material: ..... PC-GF
- Weight: ..... approx. 0.3 kg

### **Connection diagram:**

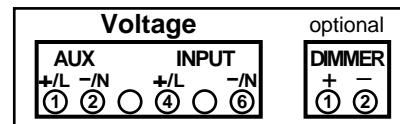


# CD40-72v-VDC

## DC VOLTAGE METER

### Auxiliary Supply variations:

(Voltage / Insulation)	
5 V, 12 V, 24 V, 48 V DC ±50 %, converter	/ 1 kV
55...264 V, 47...440 Hz, and 72...370 V DC, converter	/ 3 kV
9...28 V DC	/ not isolated from display
At 72...370 V DC input voltage range, self powered version is also available.	

### Isolation scheme:

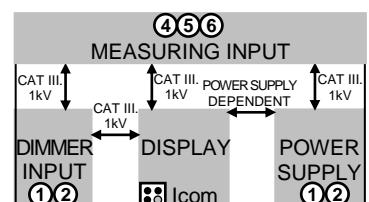

### Ordering examples: (Input; Display: range, unit, colour; Auxiliary Supply)

CD40-72v-VDC \_ Input: 0...±110 V DC \_ Display: 0...±100.0 kV, red \_ Aux: 55..264 V AC converter

CD40-72v-VDC \_ Input: 0...±500 V DC \_ Display: 0...±500.0 V, green, dimmable \_ Aux: 24 V DC converter

On request for extra charge special ranges (Input, Display, Auxiliary Supply) are possible.

### Outline and cut-out dimensions:

